


# RFID Reader Module (#28140)

RFID 54 mm x 85 mm Rectangle Tag (#28141)

RFID 50 mm Round Tag (#28142)

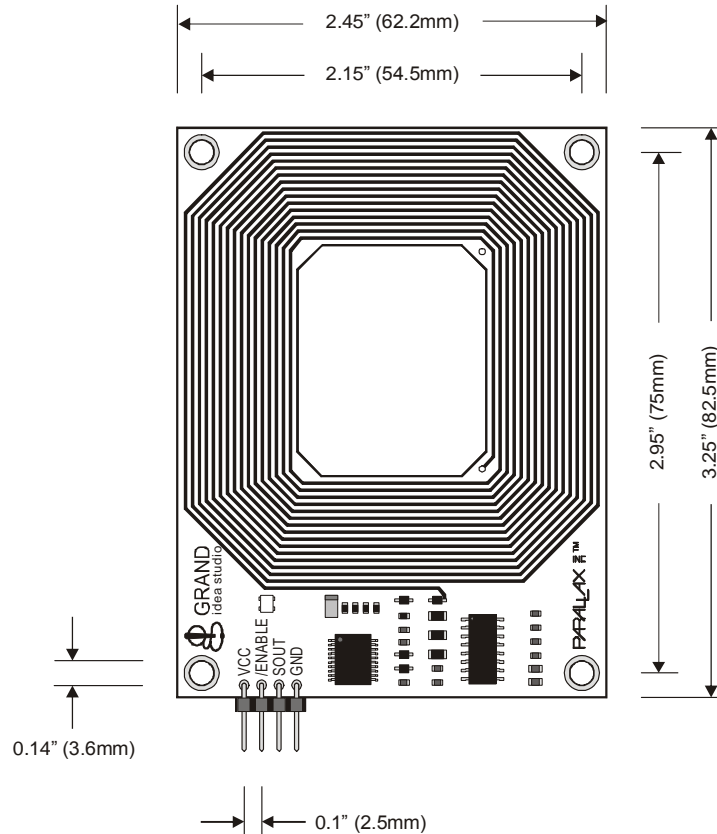

## Introduction

Designed with Grand Idea Studio (<http://www.grandideastudio.com/>), the Parallax Radio Frequency Identification (RFID) Reader Module is the first low-cost solution designed to read passive RFID transponder tags from up to 4 inches away. The RFID Reader Module can be used in a wide variety of hobbyist and commercial applications, including access control, automatic identification, robotics navigation, inventory tracking, payment systems, and car immobilization.

- Fully-integrated, low-cost method of reading passive RFID transponder tags
- 1-wire, 2400 baud Serial TTL interface to PC, BASIC Stamp® and other processors
- Requires single +5VDC supply
- Bi-color LED for visual indication of activity
- 0.100" pin spacing for easy prototyping and integration


The Parallax RFID Reader Module works exclusively with the EM Microelectronics-Marin SA EM4100-family of passive read-only transponder tags. A variety of different tag types and styles exist with the most popular made available from Parallax. Each transponder tag contains a unique identifier (one of 240, or 1,099,511,627,776, possible combinations) that is read by the RFID Reader Module and transmitted to the host via a simple serial interface.

## Electronic Connections

The Parallax RFID Reader Module can be integrated into any design using only four connections (VCC, /ENABLE, SOUT, GND). Use the following circuit for connecting the Parallax RFID Reader Module to the BASIC Stamp microcontroller:

| Pin | Pin Name | Type | Function  |
|-----|----------|------|---|
| 1   | VCC      | P    | System power, +5V DC input.   |
| 2   | /ENABLE  | I    | Module enable pin. Active LOW digital input. Bring this pin LOW to enable the RFID reader and activate the antenna. |
| 3   | SOUT     | O    | Serial Out. TTL-level interface, 2400bps, 8 data bits, no parity, 1 stop bit, true.                                 |
| 4   | GND      | G    | System ground. Connect to power supply's ground (GND) terminal.   |

Note: Type: I = Input, O = Output, P = Power, G = Ground

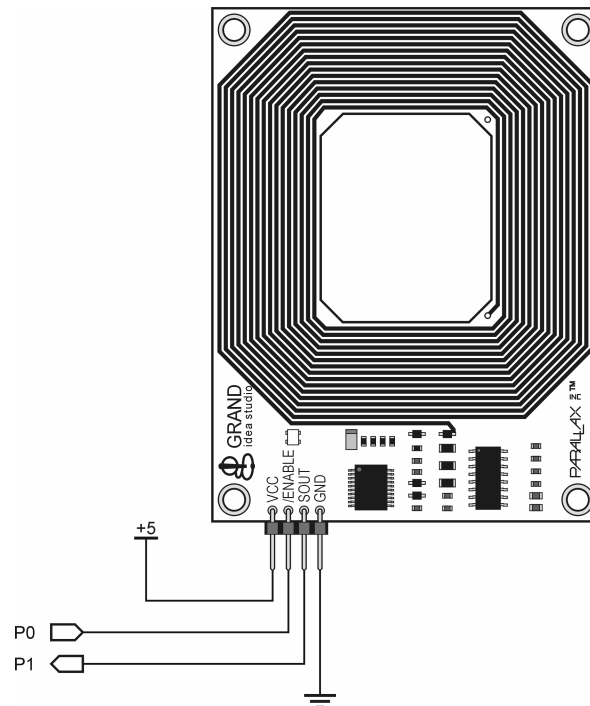

## Communication Protocol

Implementation and usage of the RFID Reader Module is straightforward. A BASIC Stamp 1, 2, and SX28AC/DP code example (SX/B) are included at the end of this documentation.

A visual indication of the state of the RFID Reader Module is given with the on-board LED. When the module is successfully powered-up and is in an idle state, the LED will be GREEN. When the module is in an active state and the antenna is transmitting, the LED will be RED.

The RFID Reader Module is controlled with a single TTL-level active-low /ENABLE pin. When the /ENABLE pin is pulled LOW, the module will enter its active state and enable the antenna to interrogate for tags. The current consumption of the module will increase dramatically when the module is active.

The face of the RFID tag should be held parallel to the front or back face of the antenna (where the majority of RF energy is focused). If the tag is held sideways (perpendicular to the antenna) you'll either get no reading or a poor reading distance. Only one transponder tag should be held up to the antenna at any time. The use of multiple tags at one time will cause tag collisions and confuse the reader. The two tags available in the Parallax store have a read distance of approximately 4 inches. Actual distance may vary slightly depending on the size of the transponder tag and environmental conditions of the application.

When a correct RFID transponder tag is placed within range of the reader, the unique ID will be transmitted as a 12-byte ASCII string via the TTL-level SOUT (Serial Output) pin in the following format:

| MSB                  |                      |                      |                      |                      |                      |                      |                      |                      |                      | LSB                   |                     |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|-----------------------|---------------------|
| Start Byte<br>(0x0A) | Unique ID<br>Digit 1 | Unique ID<br>Digit 2 | Unique ID<br>Digit 3 | Unique ID<br>Digit 4 | Unique ID<br>Digit 5 | Unique ID<br>Digit 6 | Unique ID<br>Digit 7 | Unique ID<br>Digit 8 | Unique ID<br>Digit 9 | Unique ID<br>Digit 10 | Stop Byte<br>(0x0D) |

The start byte and stop byte are used to easily identify that a correct string has been received from the reader (they correspond to a line feed and carriage return characters, respectively). The middle ten bytes are the actual tag's unique ID.

All communication is 8 data bits, no parity, 1 stop bit, non-inverted, least significant bit first (8N1). The baud rate is configured for 2400bps, a standard communications speed supported by most any microprocessor or PC, and cannot be changed. The Parallax RFID Reader Module initiates all communication. The Parallax RFID Reader Module can connect directly to any TTL-compatible UART or to an RS232-compatible interface by using an external level shifter.

## Absolute Maximum Ratings and Electrical Characteristics

| Condition                                   | Value           |
|---|-----------------|
| Operating Temperature                       | -40°C to +85°C  |
| Storage Temperature                         | -55°C to +125°C |
| Supply Voltage ( $V_{CC}$ )                 | +4.5V to +5.5V  |
| Ground Voltage ( $V_{SS}$ )                 | 0V              |
| Voltage on any pin with respect to $V_{SS}$ | -0.3V to +7.0V  |

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operation listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

## DC Characteristics


At  $V_{CC} = +5.0V$  and  $T_A = 25^\circ C$  unless otherwise noted

| Parameter              | Symbol     | Test Conditions                | Specification  |       |      | Unit |
|------------------------|------------|--------------------------------|----------------|-------|------|------|
|                        |            |                                | Min.           | Typ.  | Max. |      |
| Supply Voltage         | $V_{CC}$   | ---                            | 4.5            | 5.0   | 5.5  | V    |
| Supply Current, Idle   | $I_{IDLE}$ | ---                            | ---            | 10    | ---  | mA   |
| Supply Current, Active | $I_{CC}$   | ---                            | ---            | 199.2 | ---  | mA   |
| Input LOW voltage      | $V_{IL}$   | $+4.5V \leq V_{CC} \leq +5.5V$ | ---            | ---   | 0.8  | V    |
| Input HIGH voltage     | $V_{IH}$   | $+4.5V \leq V_{CC} \leq +5.5V$ | 2.0            | ---   | ---  | V    |
| Output LOW voltage     | $V_{OL}$   | $V_{CC} = +4.5V$               | ---            | ---   | 0.6  | V    |
| Output HIGH voltage    | $V_{OH}$   | $V_{CC} = +4.5V$               | $V_{CC} - 0.7$ | ---   | ---  | V    |

## RFID Tags from Parallax

Parallax provides two passive RFID tags from our on-line store. We're stocking the tags because many suppliers have high minimums, yet many of our customers may only want a few tags for their basic experimentation.

- 54 mm x 85 mm Rectangle Tag (#28141)
- 50 mm Round Tag (#28142)

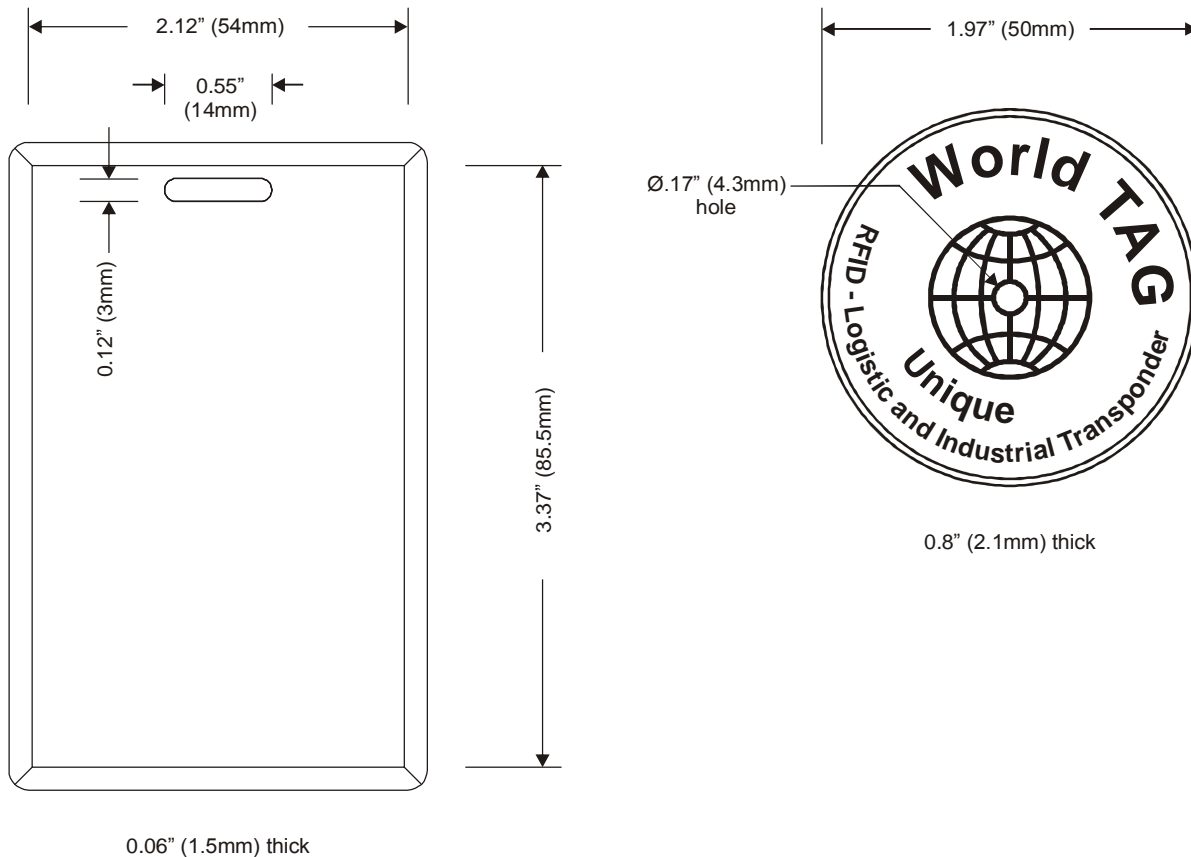

## RFID Technology Overview

Material in this section is based on information provided by the RFID Journal ([www.rfidjournal.com](http://www.rfidjournal.com)).

Radio Frequency Identification (RFID) is a generic term for non-contacting technologies that use radio waves to automatically identify people or objects. There are several methods of identification, but the most common is to store a unique serial number that identifies a person or object on a microchip that is attached to an antenna. The combined antenna and microchip are called an "RFID transponder" or "RFID tag" and work in combination with an "RFID reader" (sometimes called an "RFID interrogator").

An RFID system consists of a reader and one or more tags. The reader's antenna is used to transmit radio frequency (RF) energy. Depending on the tag type, the energy is "harvested" by the tag's antenna and used to power up the internal circuitry of the tag. The tag will then modulate the electromagnetic waves generated by the reader in order to transmit its data back to the reader. The reader receives the modulated waves and converts them into digital data. In the case of the Parallax RFID Reader Module, correctly received digital data is sent serially through the SOUT pin.

There are two major types of tag technologies. "Passive tags" are tags that do not contain their own power source or transmitter. When radio waves from the reader reach the chip's antenna, the energy is converted by the antenna into electricity that can power up the microchip in the tag (known as "parasitic power"). The tag is then able to send back any information stored on the tag by reflecting the electromagnetic waves as described above. "Active tags" have their own power source and transmitter. The power source, usually a battery, is used to run the microchip's circuitry and to broadcast a signal to a reader. Due to the fact that passive tags do not have their own transmitter and must reflect their signal to the reader, the reading distance is much shorter than with active tags. However, active tags are typically larger, more expensive, and require occasional service. The RFID Reader Module is designed specifically for low-frequency (125kHz) passive tags.

Frequency refers to the size of the radio waves used to communicate between the RFID system components. Just as you tune your radio to different frequencies in order to hear different radio stations, RFID tags and readers have to be tuned to the same frequency in order to communicate effectively. RFID systems typically use one of the following frequency ranges: low frequency (or LF, around 125 and 134.2 kHz), high frequency (or HF, around 13.56 MHz), ultra-high frequency (or UHF, around 868 and 928 MHz), or microwave (around 2.45 and 5.8 GHz). It is generally safe to assume that a higher frequency equates to a faster data transfer rate and longer read ranges, but also more sensitivity to environmental factors such as liquid and metal that can interfere with radio waves.

There really is no such thing as a "typical" RFID tag. The read range of a tag ultimately depends on many factors: the frequency of RFID system operation, the power of the reader, and interference from other RF devices. Balancing a number of engineering trade-offs (antenna size v. reading distance v. power v. manufacturing cost), the Parallax RFID Reader Module's antenna was designed with a specific inductance and "Q" factor for 125kHz RFID operation at a tag read distance of up to 4".

## Example Code

The following code examples read tags from a RFID Reader Module and compare the values to known tags (stored in an EEPROM table).

```
' =====
'
' File..... RFID.BS1
' Purpose.... RFID Tag Reader / Simple Security System
' Author..... (c) Parallax, Inc. -- All Rights Reserved
' E-mail..... support@parallax.com
' Started....
' Updated.... 07 FEB 2005
'
' {$STAMP BS1}
' {$PBASIC 1.0}
' =====

' -----[ Program Description ]-----
'
' Reads tags from a Parallax RFID reader and compares to known tags (stored
' in EEPROM table). If tag is found, the program will disable a lock.

' -----[ Revision History ]-----

' -----[ I/O Definitions ]-----

SYMBOL Enable          = 0           ' low = reader on
SYMBOL RX              = 1           ' serial from reader
SYMBOL Spkr           = 2           ' speaker output
SYMBOL Latch          = 3           ' lock/latch control

' -----[ Constants ]-----

SYMBOL LastTag        = 2           ' 3 tags; 0 to 2

' -----[ Variables ]-----

SYMBOL tag0           = B0           ' RFID bytes buffer
SYMBOL tag1           = B1
SYMBOL tag2           = B2
SYMBOL tag3           = B3
SYMBOL tag4           = B4
SYMBOL tag5           = B5
SYMBOL tag6           = B6
SYMBOL tag7           = B7
SYMBOL tag8           = B8
SYMBOL tag9           = B9

SYMBOL tagNum         = B10          ' from EEPROM table
SYMBOL pntr           = B11          ' pointer to char in table
SYMBOL char           = B12          ' character from table

' -----[ EEPROM Data ]-----
```

```

Tags:
  EEPROM ("0F0184F20B")           ' valid tags
  EEPROM ("0F01D9D263")
  EEPROM ("04129C1B43")
  EEPROM ("0000000000")           ' space for other tags
  EEPROM ("0000000000")

' -----[ Initialization ]-----

Reset:
  HIGH Enable                       ' turn of RFID reader
  LOW Latch                          ' lock the door!

' -----[ Program Code ]-----

Main:
  LOW Enable                          ' activate the reader
  SERIN RX, T2400, ($0A)              ' wait for header
  SERIN RX, T2400, tag0, tag1, tag2, tag3, tag4 ' get tag bytes
  SERIN RX, T2400, tag5, tag6, tag7, tag8, tag9
  HIGH Enable                          ' deactivate reader

Check_List:
  FOR tagNum = 0 TO LastTag           ' scan through known tags
    pntr = tagNum * 10 + 0 : READ pntr, char ' read char from DB
    IF char <> tag0 THEN Bad_Char          ' compare with tag data
    pntr = tagNum * 10 + 1 : READ pntr, char
    IF char <> tag1 THEN Bad_Char
    pntr = tagNum * 10 + 2 : READ pntr, char
    IF char <> tag2 THEN Bad_Char
    pntr = tagNum * 10 + 3 : READ pntr, char
    IF char <> tag3 THEN Bad_Char
    pntr = tagNum * 10 + 4 : READ pntr, char
    IF char <> tag4 THEN Bad_Char
    pntr = tagNum * 10 + 5 : READ pntr, char
    IF char <> tag5 THEN Bad_Char
    pntr = tagNum * 10 + 6 : READ pntr, char
    IF char <> tag6 THEN Bad_Char
    pntr = tagNum * 10 + 7 : READ pntr, char
    IF char <> tag7 THEN Bad_Char
    pntr = tagNum * 10 + 8 : READ pntr, char
    IF char <> tag8 THEN Bad_Char
    pntr = tagNum * 10 + 9 : READ pntr, char
    IF char <> tag9 THEN Bad_Char
    GOTO Tag_Found                    ' all match -- good tag

Bad_Char:
  NEXT

Bad_Tag:
  SOUND Spkr, (25, 80)                ' groan
  PAUSE 1000
  GOTO Main

Tag_Found:
  DEBUG #tagNum, CR                    ' for testing
  HIGH Latch                           ' remove latch
  SOUND Spkr, (114, 165)               ' beep
  LOW Latch                             ' restore latch
  GOTO Main

END

```

```

' =====
'
' File..... RFID.BS2
' Purpose.... RFID Tag Reader / Simple Security System
' Author..... (c) Parallax, Inc. -- All Rights Reserved
' E-mail..... support@parallax.com
' Started....
' Updated.... 07 FEB 2005
'
'   {$STAMP BS2}
'   {$PBASIC 2.5}
'
' =====

' -----[ Program Description ]-----
'
' Reads tags from a Parallax RFID reader and compares to known tags (stored
' in EEPROM table).  If tag is found, the program will disable a lock.

' -----[ Revision History ]-----

' -----[ I/O Definitions ]-----

Enable          PIN      0          ' low = reader on
RX              PIN      1          ' serial from reader
Spkr            PIN      2          ' speaker output
Latch           PIN      3          ' lock/latch control

' -----[ Constants ]-----

#SELECT $STAMP
#CASE BS2, BS2E, BS2PE
  T1200         CON      813
  T2400         CON      396
  T4800         CON      188
  T9600         CON      84
  T19K2         CON      32
  TMidi         CON      12
  T38K4         CON      6
#CASE BS2SX, BS2P
  T1200         CON      2063
  T2400         CON      1021
  T4800         CON      500
  T9600         CON      240
  T19K2         CON      110
  TMidi         CON      60
  T38K4         CON      45
#ENDSELECT

SevenBit        CON      $2000
Inverted         CON      $4000
Open             CON      $8000
Baud             CON      T2400

#SELECT $STAMP
#CASE BS2, BS2E
  TmAdj         CON      $100          ' x 1.0 (time adjust)
  FrAdj         CON      $100          ' x 1.0 (freq adjust)

```



```

#CASE BS2SX
  TmAdj      CON      $280                ' x 2.5
  FrAdj      CON      $066                ' x 0.4
#CASE BS2P
  TmAdj      CON      $3C5                ' x 3.77
  FrAdj      CON      $044                ' x 0.265
#CASE BS2PE
  TmAdj      CON      $100                ' x 1.0
  FrAdj      CON      $0AA                ' x 0.665
#ENDSELECT

LastTag      CON      3

#DEFINE __No_SPRAM = ($STAMP < BS2P)      ' does module have SPRAM?

' -----[ Variables ]-----

#IF __No_SPRAM #THEN
  buf         VAR      Byte(10)           ' RFID bytes buffer
#ELSE
  chkChar     VAR      Byte               ' character to test
#ENDIF

tagNum       VAR      Nib                 ' from EEPROM table
idx          VAR      Byte                ' tag byte index
char         VAR      Byte                ' character from table

' -----[ EEPROM Data ]-----

Tag1         DATA    "0F0184F20B"        ' valid tags
Tag2         DATA    "0F01D9D263"
Tag3         DATA    "04129C1B43"

Name0        DATA    "Unauthorized", CR, 0
Name1        DATA    "George W. Bush", CR, 0
Name2        DATA    "Dick Cheney", CR, 0
Name3        DATA    "Condoleeza Rice", CR, 0

' -----[ Initialization ]-----

Reset:
  HIGH Enable          ' turn of RFID reader
  LOW Latch            ' lock the door!

' -----[ Program Code ]-----

Main:
  LOW Enable           ' activate the reader
  #IF __No_SPRAM #THEN
    SERIN RX, T2400, [WAIT($0A), STR buf\10] ' wait for hdr + ID
  #ELSE
    SERIN RX, T2400, [WAIT($0A), SPSTR 10]
  #ENDIF
  HIGH Enable         ' deactivate reader

Check_List:
  FOR tagNum = 1 TO LastTag ' scan through known tags

```

```

FOR idx = 0 TO 9                                ' scan bytes in tag
  READ (tagNum - 1 * 10 + idx), char           ' get tag data from table
  #IF __No_SPRAM #THEN
    IF (char <> buf(idx)) THEN Bad_Char        ' compare tag to table
  #ELSE
    GET idx, chkChar                           ' read char from SPRAM
    IF (char <> chkChar) THEN Bad_Char        ' compare to table
  #ENDIF
NEXT
GOTO Tag_Found                                ' all bytes match!

Bad_Char:                                     ' try next tag
NEXT

Bad_Tag:
  tagNum = 0
  GOSUB Show_Name                             ' print message
  FREQOUT Spkr, 1000 */ TmAdj, 115 */ FrAdj    ' groan
  PAUSE 1000
  GOTO Main

Tag_Found:
  GOSUB Show_Name                             ' print name
  HIGH Latch                                  ' remove latch
  FREQOUT Spkr, 2000 */ TmAdj, 880 */ FrAdj    ' beep
  LOW Latch                                   ' restore latch
  GOTO Main

END

' -----[ Subroutines ]-----
' Prints name associated with RFID tag

Show_Name:
  DEBUG DEC tagNum, ": "
  LOOKUP tagNum,
    [Name0, Name1, Name2, Name3], idx         ' point to first character
  DO
    READ idx, char                            ' read character from name
    IF (char = 0) THEN EXIT                   ' if 0, we're done
    DEBUG char                                 ' otherwise print it
    idx = idx + 1                              ' point to next character
  LOOP
  RETURN

```